




**Equipment**

# Linear pulling winches

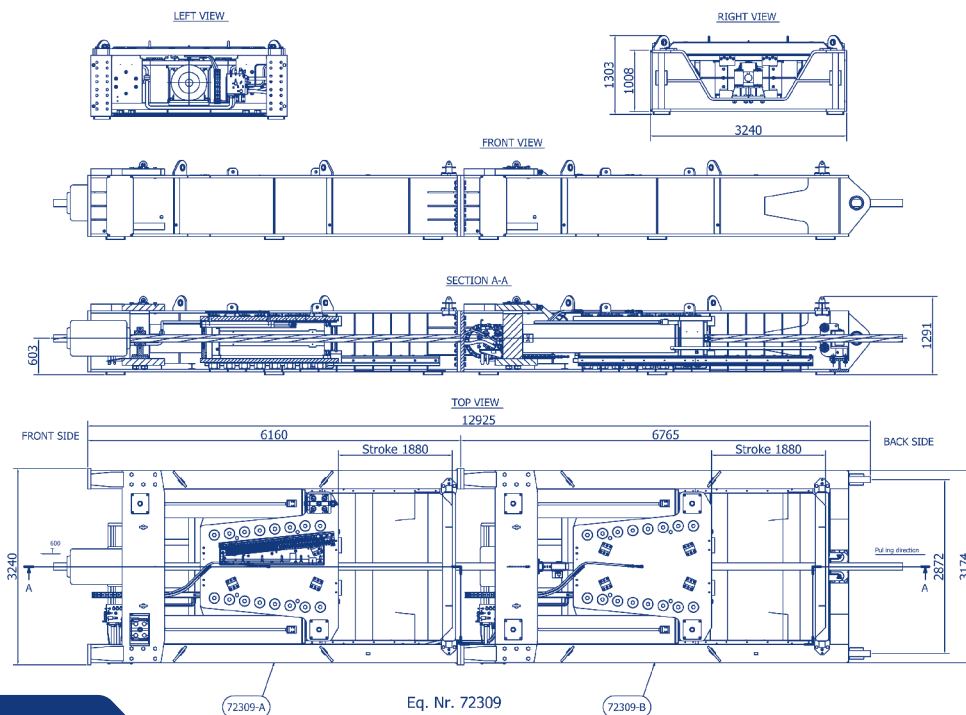

**Linear pulling winches**

Linear winch*	KTC 600	KTC 350	KTC 350	KTC 300 (2x)
Max. safe working load (metric ton)	600	350	350	300
Wire rope range (mm)	up to 154	up to 109	up to 109	up to 95
Main cylinder stroke (m)	1.88	2.0	2.0	1.7
Speed (m/min.)	Average: 2@600T Maximum: 3@400T Adjustable between 20-100%	Average: 3.2@350T Maximum: 6.3@150T Adjustable between 20-100%	Average: 3.3@350T - Adjustable between 20-100%	Average: 3.5@300T Maximum: 6.3@130T Adjustable between 20-100%
Socket passage (mm)	590 x 950	420 x 790	420 x 790	420 x 760
Dimensions (L x W x H in mm)	12,925 x 3,240 x 1,303	11,480 x 2,450 x 960	11,480 x 2,450 x 1,007	10,850 x 2,300 x 960
Weight (ton)	83 (40+43)	39.5	39.5	36
Hydraulic Power Unit (HPU)				
Dimensions (L x W x H in mm)	9,125 x 2,438 x 3,060	9,082 x 2,450 x 3,120	11,480 x 2,450 x 1,007	6,058 x 2,438 x 3,329
Weight full of fuel/oil (ton)	23	15	21	12
Power	2 diesel engines Caterpillar C9 rated@240 kW	2 diesel engines Cummins 6BT5.9C rated@127 kW	2 diesel engines MTU 6R 183 AA32 rated@147 kW	2 diesel engines Cummins 6BT5.9C rated@127 kW
Fuel tank capacity (ltr)	2 x 900	900	1,400	900
Oil tank capacity (ltr)	3,000	1,500	1,500	1,500
Fuel consumption each engine (L/hr under full load)	64	45	50	45

\* Brand Kley France and classified by Bureau Veritas

**Auxiliary equipment**

- 1 x reel drive + reel with 3000 m capacity of 92 mm wire
- 2 x reel drive + 4 x reel with 1800 m capacity of 90 mm wire
- 6 x reel drive + 15 x reel with 1000 m capacity of 92 mm wire
- 4 x reel drive + 5 x reel with 900 m capacity of 121 mm wire
- 1 x general reel drive which can hold most fabric reels

**Contact**

**Van Oord**  
 PO Box 8574  
 3009 AN Rotterdam  
 The Netherlands  
**T** +31 88 8260000  
**F** +31 88 8265010  
**E** info@vanoord.com  
**I** www.vanoord.com

**Van Oord Offshore**  
 PO Box 458  
 4200 AL Gorinchem  
 The Netherlands  
**T** +31 88 8265200  
**F** +31 88 8265210  
**E** area.off@vanoord.com